

ARTICULIGHT

15-06 Morlot Avenue, Fair Lawn, NJ 07410 USA Tel: (201) 796-2690 Fax: (201) 796-8818

info@articulight.com

articulight@aol.com

www.articulight.com

LED SERIES

RECESSA 21

275mm Recessed Wall/Ceiling Washer



CE UL    IP65

The RECESSA 21 features 21 1W high-power LEDs mounted beneath a toughened glass lens, which is UV treated to preserve transparency throughout the life of the fixture. Rated IP65 <http://articulight.com/acc/IPRatings.html>, with a housing of double powder coated die cast aluminum, the unique mounting system allows the fixtures to be easily installed, providing a secure mounting platform to most recessed construction surfaces. The RECESSA 21 utilizes just 32W of power offering energy efficient operation. The RECESSA 21 is perfect for both interior and exterior applications.

TECHNICAL SPECIFICATIONS	
Light Source:	21 x 1 watt LEDs
Projecting Distance:	100 lux @ 3 meters
LED Life:	>50,000 hours
Power Consumption:	32 watts
Mains Connection Method:	Hard Wired Connection
Control Connection	3 pin XLR (RGB & WAB Versions Only)

Method:	
Housing Material:	Die Cast Aluminum
Diffuser Material:	Toughened Glass
Weight:	3.35 kg
IP rate Object:	6 = Totally protected against dust
IP rate Liquid:	5 = Protected against low pressure jets if water from all directions - limited ingress permitted
Voltages:	90-250v AC



COLORS
White
Warm White
Cool White
RGB (3 LEDs)
Blue / White LED Mix
Amber / White LED Mix
Amber / White / Blue Mix

TYPICAL APPLICATIONS
Feature Lighting
Functional Lighting
Street Lighting
Amenity Lighting

Shopping Malls

BEAM ANGLE

30 degrees

FEATURES

Easy Fix Mounting Brackets

Die Cast Body


Stylish Design

Energy Efficient

EFFECTS

Wall Washing

Discrete Flood lighting

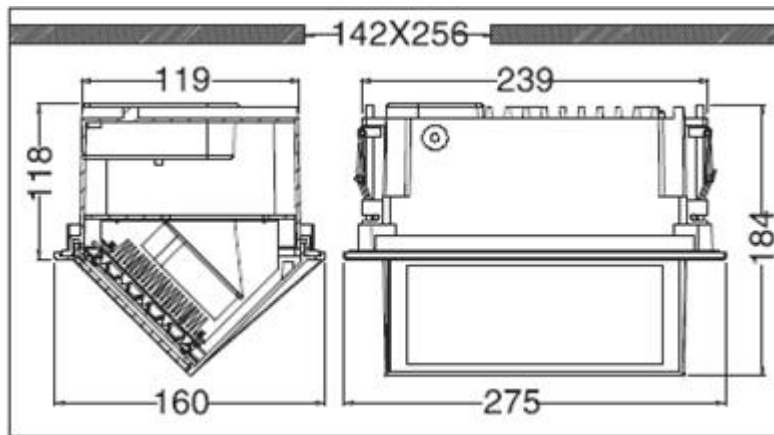

MODELS

RCS-A0323 = 21 1W LED Recessed Wall/Ceiling Washer (Specify PW, CW, WW)

RCS-A0333 = 21 1W LED Recessed Wall/Ceiling Washer (White / Yellow Mix LEDs)

RCS-A0313 = 21 1W LED Recessed Wall/Ceiling Washer (Amber, White, Blue mix LEDs)
RCS-A0343 = 21 1W LED Recessed Wall/Ceiling Washer (RGB LEDs)

DUE TO CONTINUOUS IMPROVEMENTS, SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE.

RECESSA 36
295mm Recessed Wall/Ceiling Washer



Sharing the same high qualities of engineering and finish as the smaller RECESSA 21, the RECESSA 36

features 36 1W LEDs delivering impressively high levels of clean illumination while utilizing just 54W in operation. The easy to install mounting system allows optimum positioning of the fixtures for recessed exterior and interior wall wash applications. Manufactured to exceed CE/UL standards, RECESSA 36 are rated IP65 <http://articulight.com/acc/IPRatings.html> with 2 layers of protective waterproofing within the connection compartment.

TECHNICAL SPECIFICATIONS	
Light Source:	36 x 1 watt LEDs
Projecting Distance:	300 lux @ 2.5 metres
LED Life:	> 50,000 hours
Power Consumption:	54 watts
Mains Connection Method:	Hard Wired Connection
Control Connection Method:	3 pin XLR (RGB & WAB Versions Only)
Housing Material:	Die Cast Aluminum

Diffuser Material:	Toughened Glass
Weight:	4.7 kg
IP rate Object:	6 = Totally protected against dust
IP rate Liquid:	5 = Protected against low pressure jets if water from all directions - limited ingress permitted
Voltages:	90-250v AC



COLORS
White
Warm White
Cool White
RGB (3 LEDs)
Blue / White LED Mix
Amber / White LED Mix
Amber / White / Blue Mix


TYPICAL APPLICATIONS
Feature Lighting
Functional Lighting
Street Lighting
Amenity Lighting
Shopping Malls

BEAM ANGLE
30 degrees

FEATURES
Easy Fix Mounting Brackets
Die Cast Body
Stylish Design
Energy Efficient

EFFECTS
Wall Washing

Discrete Flood lighting

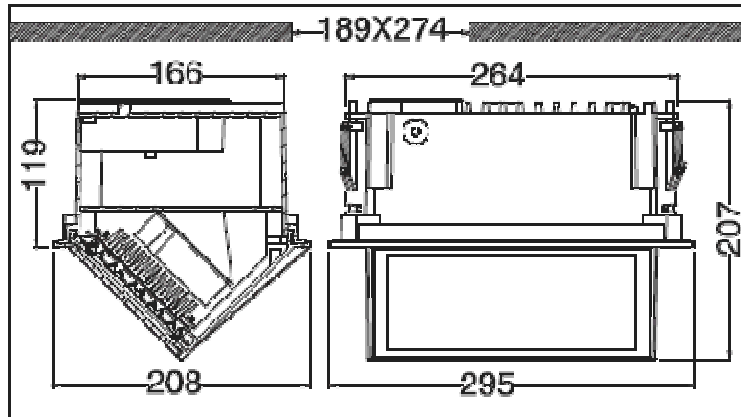

MODELS
RCS-A0403 = 36 LED Recessed Wall/Ceiling Washer (Specify WW, PW or CW)
RCS-A0393 = 36 LED Recessed Wall/Ceiling Washer (White / Yellow Mix LEDs)
RCS-A0423 = 36 LED Recessed Wall/Ceiling Washer (Amber, White, Blue mix LEDs)
RCS-A0413 = 36 LED Recessed Wall/Ceiling Washer (RGB LEDs)

DUE TO CONTINUOUS IMPROVEMENTS, SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE.

RECESSA 45

320mm Recessed Wall/Ceiling Washer





The RECESSA 45 features 45 1W LEDs delivering impressively high levels of clean illumination. RECESSA 45 is designed for recessed, exterior and interior wall/ceiling down-wash applications requiring higher levels of illumination with color distribution. Manufactured to exceed CE/UL standards, RECESSA 45 is rated IP65 <http://articulight.com/acc/IPRatings.html> with 2 layers of protective waterproofing within the connection compartment. With LED operating life of up to 80,000 hours and requiring just 67W in operation, RECESSA 45 is robustly engineered and equipped with a unique mounting system which allows the fixtures to easily installed in almost any recessed application.

TECHNICAL SPECIFICATIONS	
Light Source:	45 x 1 watt LEDs
Projecting Distance:	440 lux @ 2.5 meters
LED Life:	>50,000 hours
Power Consumption:	67 watts
Mains Connection Method:	Hard Wired Connection
Control Connection Method:	3 pin XLR (RGB & WAB Versions Only)
Housing Material:	Die Cast Aluminum
Diffuser Material:	Toughened Glass
Weight:	5.9 kg
IP rate Object:	6 = Totally protected against dust
IP rate Liquid:	5 = Protected against low pressure jets if water from all directions - limited ingress permitted
Voltages:	90-250v AC



COLORS
White
Warm White
Cool White
RGB (3 Leds)
Blue / White LED Mix


Amber / White LED Mix
Amber / White / Blue Mix

TYPICAL APPLICATIONS
Feature Lighting
Functional Lighting
Amenity Lighting
Shopping Malls

BEAM ANGLE
30 degrees

FEATURES
Stylish Design
Energy Efficient

EFFECTS
Wall Washing
Discrete Flood lighting

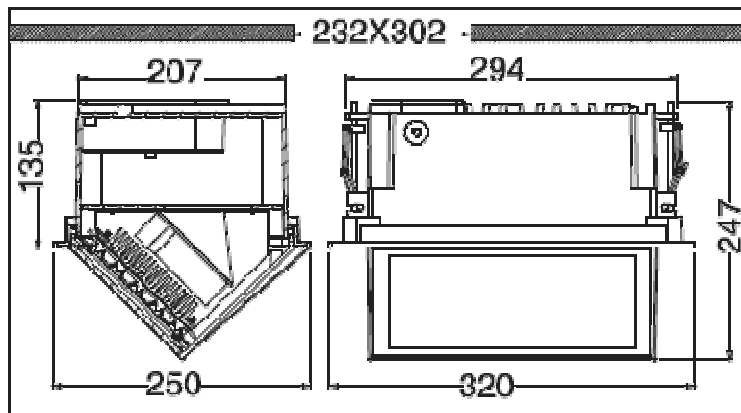

MODELS
RCS-A0253 = 45 1W LED Recessed Wall/Ceiling Washer (Specify WW, PW or CW)
RCS-A0263 = 45 1W LED Recessed Wall/Ceiling Washer (White / Yellow Mix LEDs)
RCS-A0243 = 45 1W LED Recessed Wall/Ceiling Washer (Amber, White, Blue mix LEDs)
RCS-A0273 = 45 1W LED Recessed Wall/Ceiling Washer (RGB LEDs)

DUE TO CONTINUOUS IMPROVEMENTS, SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE.